


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

4		3		2		1	
ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EOR CHECK	Applicable Tooling		
1	SSHL-002T-P0.2	GH CONNECTOR CONTACT			APPLICATOR		
2	UL1571, 28 AWG	BLACK					

Applicable Housings	
NO. OF CIRCUITS	HOUSING PART NO.
2	GHR-02V-S
3	GHR-03V-S
4	GHR-04V-S
5	GHR-05V-S
6	GHR-06V-S
7	GHR-07V-S
8	GHR-08V-S
9	GHR-09V-S
10	GHR-10V-S
11	GHR-11V-S
12	GHR-12V-S
13	GHR-13V-S
14	GHR-14V-S
15	GHR-15V-S

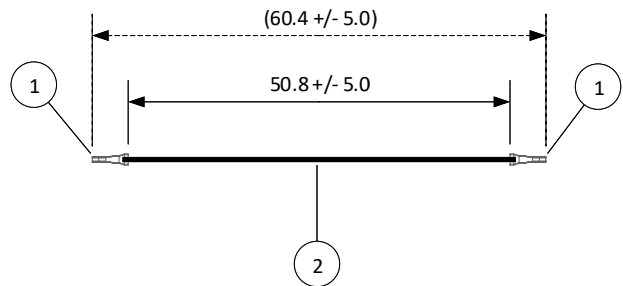

Electrical Specifications
Current: 1.0A AC/DC
Voltage: 50V AC/DC



1		Add electrical specifications		6/27/2018	SP	SCALE	CUSTOMER NAME	CUSTOMER PART NO.
						1:1		
						DIMENSIONS	DESCRIPTION	
						All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	1.25 mm Pitch GH Series Standard Leads - 2" Inside Length DOUBLE-END LEADS	
						DRAWN BY	ASSEMBLY PART NO.	
						STEVEN PILKINGTON	AGHGH28K51	
						CHECKED BY	DRAWING NO. & REVISION	REVISED
						JUSTIN BAKER	GAM-046	3/7/2016

4		3		2		1	
---	--	---	--	---	--	---	--