


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

4		3			2			1			
ITEM	CONNECTOR PART NO.	DESCRIPTION			Applicable Housings						
1	SXAM-01T-P0.6	XA CONNECTOR MALE CONTACT			XA Series			XAD Series			
2	SXA-01T-P0.6	XA CONNECTOR FEMALE CONTACT			NO. OF CIRCUITS	HOUSING PART NO. FOR SXA CONTACT	HOUSING PART NO. WITH PANEL LOCKS FOR SXAM CONTACT	HOUSING PART NO. WITHOUT PANEL LOCKS FOR SXAM CONTACT	NO. OF CIRCUITS	HOUSING PART NO. FOR SXA CONTACT	HOUSING PART NO. FOR SXAM CONTACT
3	UL1007, 22 AWG	BLACK			2	XAP-02V-1	XARR-02V	XARR-02VF	8	XADRP-08V	XADR-08V
				3	XAP-03V-1	XARR-03V	XARR-03VF	10	XADRP-10V	XADR-10V	
				4	XAP-04V-1	XARR-04V	XARR-04VF	12	XADRP-12V	XADR-12V	
				5	XAP-05V-1	XARR-05V	XARR-05VF	14	XADRP-14V	XADR-14V	
				6	XAP-06V-1	XARR-06V	XARR-06VF	16	XADRP-16V	XADR-16V	
				7	XAP-07V-1	XARR-07V	-	18	XADRP-18V	XADR-18V	
				8	XAP-08V-1	XARR-08V	XARR-08VF	20	XADRP-20V	XADR-20V	
				9	XAP-09V-1	XARR-09V	XARR-09VF	22	XADRP-22V	XADR-22V	
				10	XAP-10V-1	XARR-10V	XARR-10VF	24	XADRP-24V	XADR-24V	
				11	XAP-11V-1	XARR-11V	-	26	XADRP-26V	XADR-26V	
				12	XAP-12V-1	XARR-12V	XARR-12VF	28	XADRP-28V	XADR-28V	
				13	XAP-13V-1	XARR-13V	-	30	XADRP-30V	XADR-30V	
				14	XAP-14V-1	XARR-14V	-	32	XADRP-32V	XADR-32V	
				15	XAP-15V-1	XARR-15V	-	34	XADRP-34V	XADR-34V	
				-	-	-	-	36	XADRP-36V	XADR-36V	
				-	-	-	-	40	XADRP-40V	XADR-40V	



Electrical Specifications	
Current:	3.0A AC/DC
Voltage:	250V AC/DC

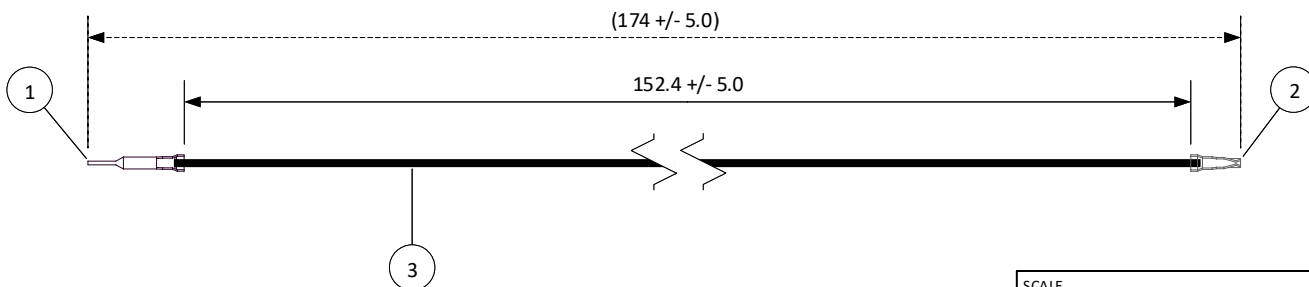

SCALE	1:1
DIMENSIONS	All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.

DESCRIPTION  
2.5 mm Pitch XA & XAD Series Standard Leads - 6" Inside Length  
DOUBLE-END LEADS, M-F

2	Add electrical specifications	7/2/2018	SP
1	Added housing part numbers for the XAD series	12/27/2017	SP
REV.	DESCRIPTION	DATE	BY

DRAWN BY  
STEVEN PILKINGTON

CHECKED BY  
JUSTIN BAKER

ASSEMBLY PART NO.  
ASXAMSXA22K152

DRAWING NO.  
GAM-077

DATE  
3/9/2016

4

3

2

1