


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

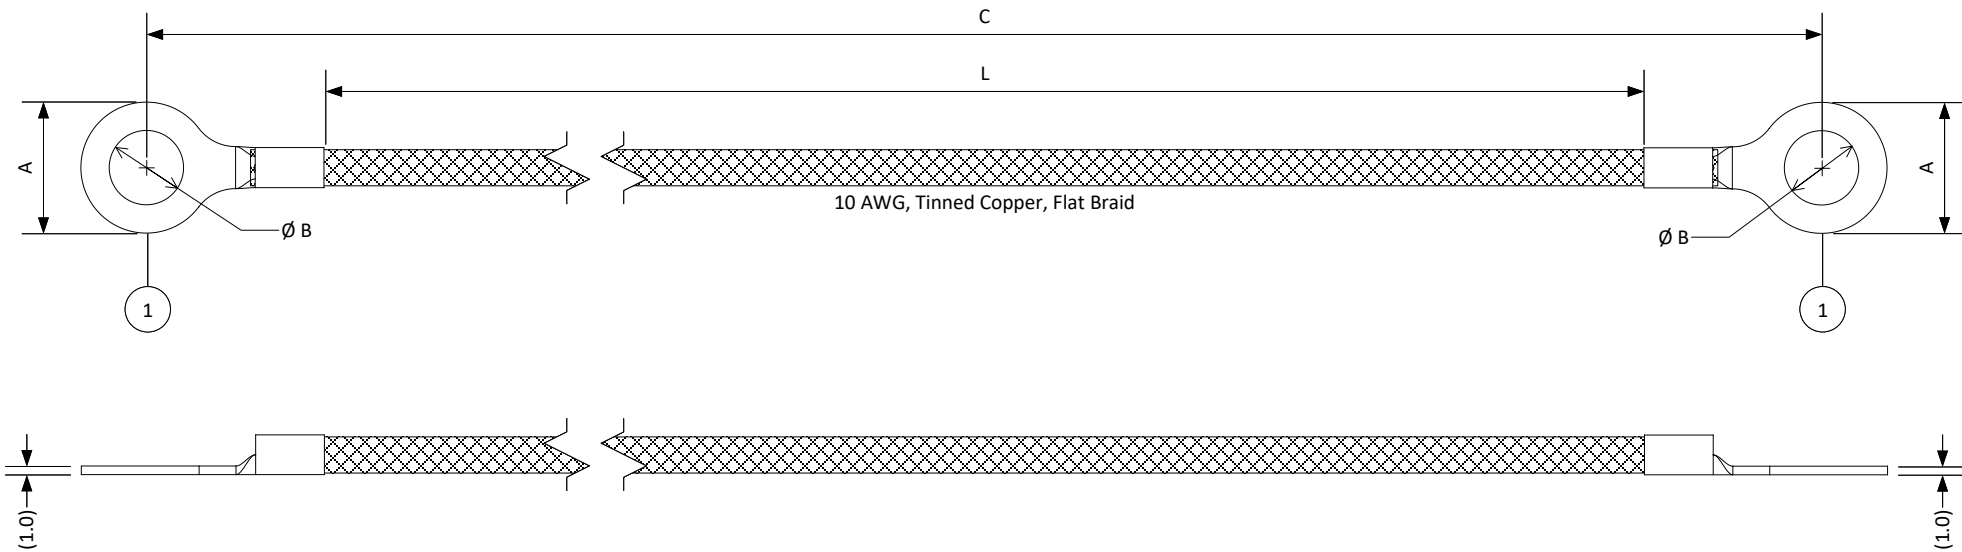

				PAGE 1 OF 2		DESCRIPTION See Tables on Page 2	
				SCALE 1: 1		PART NO. See Tables on Page 2	
				DRAWN BY STEVEN PILKINGTON		DRAWING NO. GAM-1227	
				CHECKED BY BENNY JUDKINS		DATE 4/6/2025	
REV.	DESCRIPTION	DATE	BY	DIMENSION (MM) LENGTH TOLERANCE Unless otherwise specified: ≤ 457.2: ± 5.0 (default) > 457.2 to 914.4: ± 12.0 > 914.4: ± 25.4 () = Reference			

4

3

2

1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

D

C

B

A

D

C

B

A

Table 1 = #6 STUD

JST Part Number	Description	Item 1	L	A	B	C
A55S3X210TFB102	4" Double-Ended Grounding Strap, 10AWG, #6 Stud	5.5-S3-TOR	101.6 ± 5.0	(7.2)	(3.7)	(125.8)
A55S3X210TFB203	8" Double-Ended Grounding Strap, 10AWG, #6 Stud	5.5-S3-TOR	203.2 ± 5.0	(7.2)	(3.7)	(227.4)
A55S3X210TFB305	12" Double-Ended Grounding Strap, 10AWG, #6 Stud	5.5-S3-TOR	304.8 ± 5.0	(7.2)	(3.7)	(329)
A55S3X210TFB406	16" Double-Ended Grounding Strap, 10AWG, #6 Stud	5.5-S3-TOR	406.4 ± 5.0	(7.2)	(3.7)	(430.6)
A55S3X210TFB508	20" Double-Ended Grounding Strap, 10AWG, #6 Stud	5.5-S3-TOR	508 ± 12.7	(7.2)	(3.7)	(532.2)
A55S3X210TFB610	24" Double-Ended Grounding Strap, 10AWG, #6 Stud	5.5-S3-TOR	609.6 ± 12.7	(7.2)	(3.7)	(633.8)

Table 3 = #10 STUD

JST Part Number	Description	Item 1	L	A	B	C
A555X210TFB102	4" Double-Ended Grounding Strap, 10AWG, #10 Stud	5.5-5-TOR	101.6 ± 5.0	(9.5)	(5.3)	(131.8)
A555X210TFB203	8" Double-Ended Grounding Strap, 10AWG, #10 Stud	5.5-5-TOR	203.2 ± 5.0	(9.5)	(5.3)	(233.4)
A555X210TFB305	12" Double-Ended Grounding Strap, 10AWG, #10 Stud	5.5-5-TOR	304.8 ± 5.0	(9.5)	(5.3)	(335)
A555X210TFB406	16" Double-Ended Grounding Strap, 10AWG, #10 Stud	5.5-5-TOR	406.4 ± 5.0	(9.5)	(5.3)	(436.6)
A555X210TFB508	20" Double-Ended Grounding Strap, 10AWG, #10 Stud	5.5-5-TOR	508 ± 12.7	(9.5)	(5.3)	(538.2)
A555X210TFB610	24" Double-Ended Grounding Strap, 10AWG, #10 Stud	5.5-5-TOR	609.6 ± 12.7	(9.5)	(5.3)	(639.8)

Table 5 = 3/8" STUD

JST Part Number	Description	Item 1	L	A	B	C
A5510X210TFB102	4" Double-Ended Grounding Strap, 10AWG, 3/8" Stud	5.5-10	101.6 ± 5.0	(15)	(10.5)	(142.6)
A5510X210TFB203	8" Double-Ended Grounding Strap, 10AWG, 3/8" Stud	5.5-10	203.2 ± 5.0	(15)	(10.5)	(244.2)
A5510X210TFB305	12" Double-Ended Grounding Strap, 10AWG, 3/8" Stud	5.5-10	304.8 ± 5.0	(15)	(10.5)	(345.8)
A5510X210TFB406	16" Double-Ended Grounding Strap, 10AWG, 3/8" Stud	5.5-10	406.4 ± 5.0	(15)	(10.5)	(447.4)
A5510X210TFB508	20" Double-Ended Grounding Strap, 10AWG, 3/8" Stud	5.5-10	508 ± 12.7	(15)	(10.5)	(549)
A5510X210TFB610	24" Double-Ended Grounding Strap, 10AWG, 3/8" Stud	5.5-10	609.6 ± 12.7	(15)	(10.5)	(650.6)

Table 7 = 5/8" STUD

JST Part Number	Description	Item 1	L	A	B	C
A5516X210TFB102	4" Double-Ended Grounding Strap, 10AWG, 5/8" Stud	5.5-16	101.6 ± 5.0	(32)	(17)	(165.8)
A5516X210TFB203	8" Double-Ended Grounding Strap, 10AWG, 5/8" Stud	5.5-16	203.2 ± 5.0	(32)	(17)	(267.4)
A5516X210TFB305	12" Double-Ended Grounding Strap, 10AWG, 5/8" Stud	5.5-16	304.8 ± 5.0	(32)	(17)	(369)
A5516X210TFB406	16" Double-Ended Grounding Strap, 10AWG, 5/8" Stud	5.5-16	406.4 ± 5.0	(32)	(17)	(470.6)
A5516X210TFB508	20" Double-Ended Grounding Strap, 10AWG, 5/8" Stud	5.5-16	508 ± 12.7	(32)	(17)	(572.2)
A5516X210TFB610	24" Double-Ended Grounding Strap, 10AWG, 5/8" Stud	5.5-16	609.6 ± 12.7	(32)	(17)	(673.8)

Table 2 = #8 STUD

JST Part Number	Description	Item 1	L	A	B	C
A554X210TFB102	4" Double-Ended Grounding Strap, 10AWG, #8 Stud	5.5-4-TOR	101.6 ± 5.0	(9.5)	(4.3)	(131.8)
A554X210TFB203	8" Double-Ended Grounding Strap, 10AWG, #8 Stud	5.5-4-TOR	203.2 ± 5.0	(9.5)	(4.3)	(233.4)
A554X210TFB305	12" Double-Ended Grounding Strap, 10AWG, #8 Stud	5.5-4-TOR	304.8 ± 5.0	(9.5)	(4.3)	(335)
A554X210TFB406	16" Double-Ended Grounding Strap, 10AWG, #8 Stud	5.5-4-TOR	406.4 ± 5.0	(9.5)	(4.3)	(436.6)
A554X210TFB508	20" Double-Ended Grounding Strap, 10AWG, #8 Stud	5.5-4-TOR	508 ± 12.7	(9.5)	(4.3)	(538.2)
A554X210TFB610	24" Double-Ended Grounding Strap, 10AWG, #8 Stud	5.5-4-TOR	609.6 ± 12.7	(9.5)	(4.3)	(639.8)

Table 4 = 1/4" STUD

JST Part Number	Description	Item 1	L	A	B	C
A556X210TFB102	4" Double-Ended Grounding Strap, 10AWG, 1/4" Stud	5.5-6-TOR	101.6 ± 5.0	(12)	(6.4)	(141.2)
A556X210TFB203	8" Double-Ended Grounding Strap, 10AWG, 1/4" Stud	5.5-6-TOR	203.2 ± 5.0	(12)	(6.4)	(242.8)
A556X210TFB305	12" Double-Ended Grounding Strap, 10AWG, 1/4" Stud	5.5-6-TOR	304.8 ± 5.0	(12)	(6.4)	(344.4)
A556X210TFB406	16" Double-Ended Grounding Strap, 10AWG, 1/4" Stud	5.5-6-TOR	406.4 ± 5.0	(12)	(6.4)	(446)
A556X210TFB508	20" Double-Ended Grounding Strap, 10AWG, 1/4" Stud	5.5-6-TOR	508 ± 12.7	(12)	(6.4)	(547.6)
A556X210TFB610	24" Double-Ended Grounding Strap, 10AWG, 1/4" Stud	5.5-6-TOR	609.6 ± 12.7	(12)	(6.4)	(649.2)

Table 6 = 1/2" STUD

JST Part Number	Description	Item 1	L	A	B	C
A5514X210TFB102	4" Double-Ended Grounding Strap, 10AWG, 1/2" Stud	5.5-14	101.6 ± 5.0	(32)	(15)	(165.8)
A5514X210TFB203	8" Double-Ended Grounding Strap, 10AWG, 1/2" Stud	5.5-14	203.2 ± 5.0	(32)	(15)	(267.4)
A5514X210TFB305	12" Double-Ended Grounding Strap, 10AWG, 1/2" Stud	5.5-14	304.8 ± 5.0	(32)	(15)	(369)
A5514X210TFB406	16" Double-Ended Grounding Strap, 10AWG, 1/2" Stud	5.5-14	406.4 ± 5.0	(32)	(15)	(470.6)
A5514X210TFB508	20" Double-Ended Grounding Strap, 10AWG, 1/2" Stud	5.5-14	508 ± 12.7	(32)	(15)	(572.2)
A5514X210TFB610	24" Double-Ended Grounding Strap, 10AWG, 1/2" Stud	5.5-14	609.6 ± 12.7	(32)	(15)	(673.8)

PAGE	2 OF 2	
SCALE	1: 1	
DRAWN BY	STEVEN PILKINGTON	
CHECKED BY	BENNY JUDKINS	

DIMENSION (MM) LENGTH TOLERANCE
 Unless otherwise specified:
 ≤ 457.2: ± 5.0 (default)
 > 457.2 to 914.4: ± 12.0
 > 914.4: ± 25.4
 () = Reference

DESCRIPTION	See Tables on Page 2	
PART NO.	See Tables on Page 2	
DRAWING NO.	GAM-1227	DATE
		4/6/2025



REV.	DESCRIPTION	DATE	BY

4

3

2

1