


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

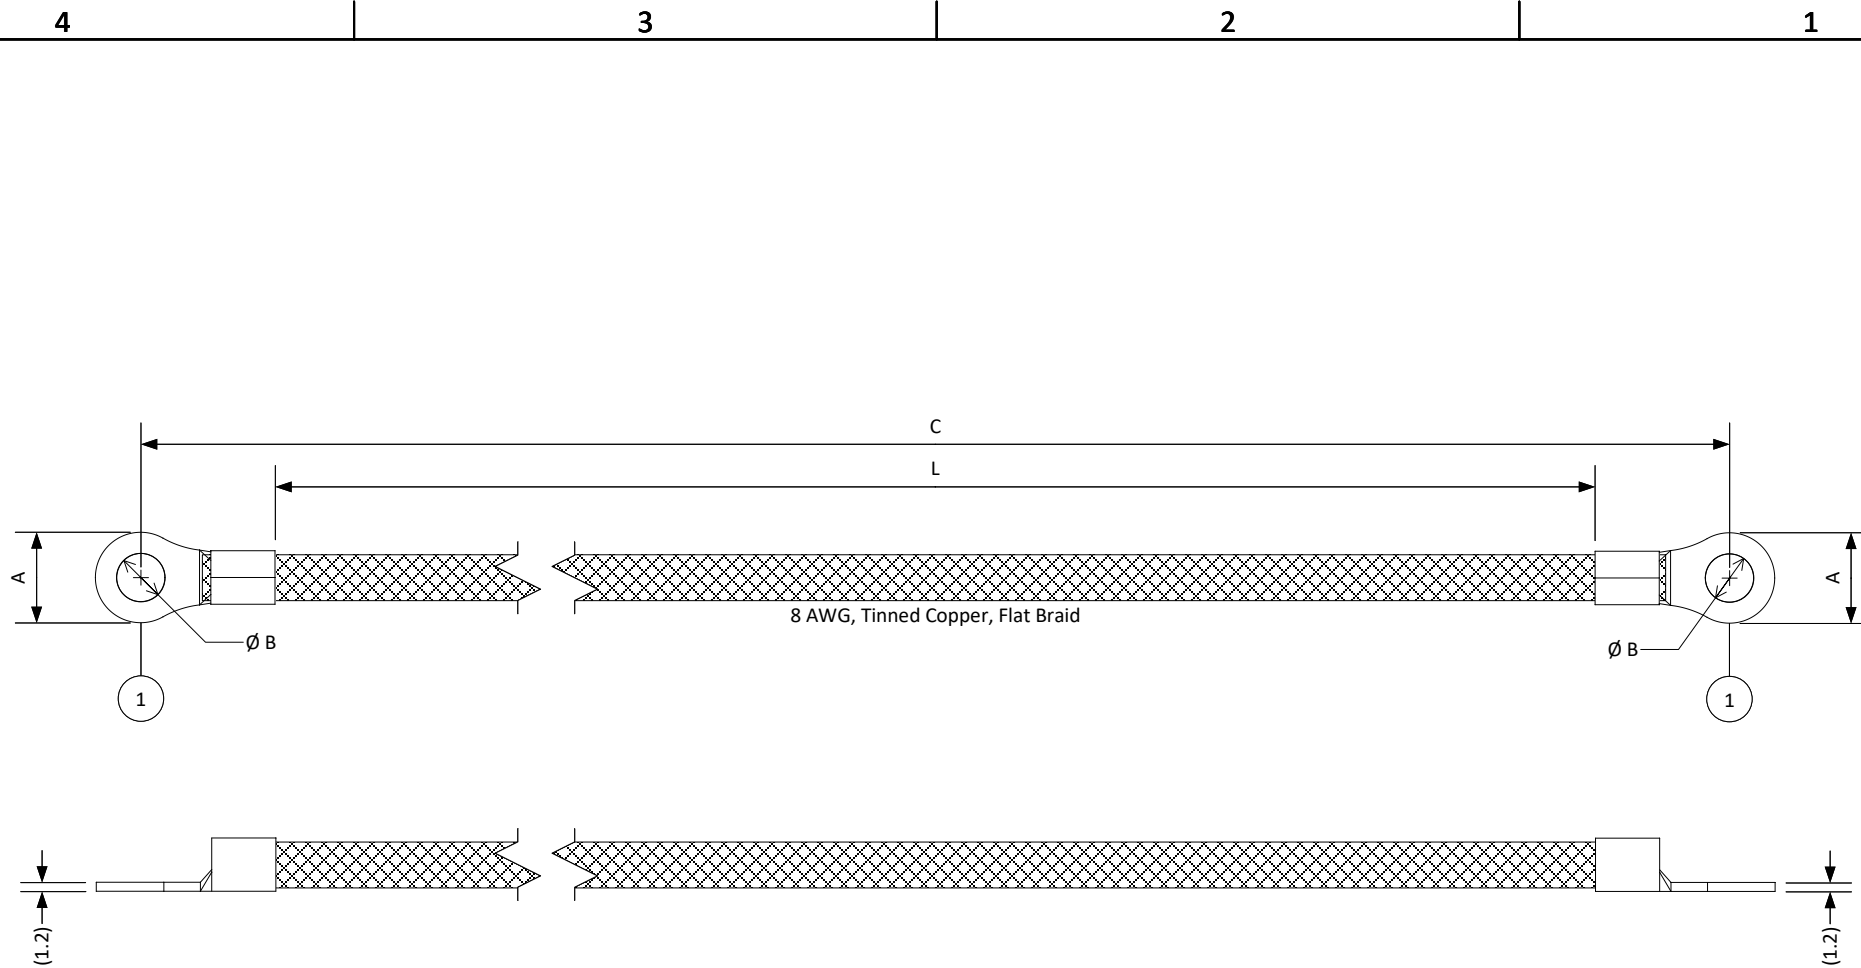

REV.	DESCRIPTION	DATE	BY

DIMENSION (MM) LENGTH TOLERANCE
 Unless otherwise specified:
 ≤ 457.2: ± 5.0 (default)
 > 457.2 to 914.4: ± 12.0
 > 914.4: ± 25.4
 () = Reference

PAGE	1 OF 2	
SCALE	1: 1	
DESCRIPTION	See Tables on Page 2	
DRAWN BY	STEVEN PILKINGTON	
CHECKED BY	BENNY JUDKINS	
PART NO.	See Tables on Page 2	
DRAWING NO.	GAM-1228	DATE
		4/7/2025

4

3

2

1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

D

D

C

C

B

B

A

A

Table 1 = #8 STUD

JST Part Number	Description	Item 1	L	A	B	C
A84X28TFB102	4" Double-Ended Grounding Strap, 8AWG, #8 Stud	8-4	101.6 ± 5.0	(12)	(4.3)	(137.2)
A84X28TFB203	8" Double-Ended Grounding Strap, 8AWG, #8 Stud	8-4	203.2 ± 5.0	(12)	(4.3)	(238.8)
A84X28TFB305	12" Double-Ended Grounding Strap, 8AWG, #8 Stud	8-4	304.8 ± 5.0	(12)	(4.3)	(340.4)
A84X28TFB406	16" Double-Ended Grounding Strap, 8AWG, #8 Stud	8-4	406.4 ± 5.0	(12)	(4.3)	(442)
A84X28TFB508	20" Double-Ended Grounding Strap, 8AWG, #8 Stud	8-4	508 ± 12.7	(12)	(4.3)	(543.6)
A84X28TFB610	24" Double-Ended Grounding Strap, 8AWG, #8 Stud	8-4	609.6 ± 12.7	(12)	(4.3)	(645.2)

Table 2 = #10 STUD

JST Part Number	Description	Item 1	L	A	B	C
A85X28TFB102	4" Double-Ended Grounding Strap, 8AWG, #10 Stud	8-5	101.6 ± 5.0	(12)	(5.3)	(137.2)
A85X28TFB203	8" Double-Ended Grounding Strap, 8AWG, #10 Stud	8-5	203.2 ± 5.0	(12)	(5.3)	(238.8)
A85X28TFB305	12" Double-Ended Grounding Strap, 8AWG, #10 Stud	8-5	304.8 ± 5.0	(12)	(5.3)	(340.4)
A85X28TFB406	16" Double-Ended Grounding Strap, 8AWG, #10 Stud	8-5	406.4 ± 5.0	(12)	(5.3)	(442)
A85X28TFB508	20" Double-Ended Grounding Strap, 8AWG, #10 Stud	8-5	508 ± 12.7	(12)	(5.3)	(543.6)
A85X28TFB610	24" Double-Ended Grounding Strap, 8AWG, #10 Stud	8-5	609.6 ± 12.7	(12)	(5.3)	(645.2)

Table 3 = 1/4" STUD

JST Part Number	Description	Item 1	L	A	B	C
A86X28TFB102	4" Double-Ended Grounding Strap, 8AWG, 1/4" Stud	8-6	101.6 ± 5.0	(12)	(6.4)	(137.2)
A86X28TFB203	8" Double-Ended Grounding Strap, 8AWG, 1/4" Stud	8-6	203.2 ± 5.0	(12)	(6.4)	(238.8)
A86X28TFB305	12" Double-Ended Grounding Strap, 8AWG, 1/4" Stud	8-6	304.8 ± 5.0	(12)	(6.4)	(340.4)
A86X28TFB406	16" Double-Ended Grounding Strap, 8AWG, 1/4" Stud	8-6	406.4 ± 5.0	(12)	(6.4)	(442)
A86X28TFB508	20" Double-Ended Grounding Strap, 8AWG, 1/4" Stud	8-6	508 ± 12.7	(12)	(6.4)	(543.6)
A86X28TFB610	24" Double-Ended Grounding Strap, 8AWG, 1/4" Stud	8-6	609.6 ± 12.7	(12)	(6.4)	(645.2)

Table 4 = 3/8" STUD

JST Part Number	Description	Item 1	L	A	B	C
A8L10X28TFB102	4" Double-Ended Grounding Strap, 8AWG, 3/8" Stud	8-L10	101.6 ± 5.0	(20)	(10.5)	(148.6)
A8L10X28TFB203	8" Double-Ended Grounding Strap, 8AWG, 3/8" Stud	8-L10	203.2 ± 5.0	(20)	(10.5)	(250.2)
A8L10X28TFB305	12" Double-Ended Grounding Strap, 8AWG, 3/8" Stud	8-L10	304.8 ± 5.0	(20)	(10.5)	(351.8)
A8L10X28TFB406	16" Double-Ended Grounding Strap, 8AWG, 3/8" Stud	8-L10	406.4 ± 5.0	(20)	(10.5)	(453.4)
A8L10X28TFB508	20" Double-Ended Grounding Strap, 8AWG, 3/8" Stud	8-L10	508 ± 12.7	(20)	(10.5)	(555)
A8L10X28TFB610	24" Double-Ended Grounding Strap, 8AWG, 3/8" Stud	8-L10	609.6 ± 12.7	(20)	(10.5)	(656.6)

Table 5 = 1/2" STUD

JST Part Number	Description	Item 1	L	A	B	C
A814X28TFB102	4" Double-Ended Grounding Strap, 8AWG, 1/2" Stud	8-14	101.6 ± 5.0	(31.6)	(15)	(170)
A814X28TFB203	8" Double-Ended Grounding Strap, 8AWG, 1/2" Stud	8-14	203.2 ± 5.0	(31.6)	(15)	(271.6)
A814X28TFB305	12" Double-Ended Grounding Strap, 8AWG, 1/2" Stud	8-14	304.8 ± 5.0	(31.6)	(15)	(373.2)
A814X28TFB406	16" Double-Ended Grounding Strap, 8AWG, 1/2" Stud	8-14	406.4 ± 5.0	(31.6)	(15)	(474.8)
A814X28TFB508	20" Double-Ended Grounding Strap, 8AWG, 1/2" Stud	8-14	508 ± 12.7	(31.6)	(15)	(576.4)
A814X28TFB610	24" Double-Ended Grounding Strap, 8AWG, 1/2" Stud	8-14	609.6 ± 12.7	(31.6)	(15)	(678)

Table 6 = 5/8" STUD

JST Part Number	Description	Item 1	L	A	B	C
A816X28TFB102	4" Double-Ended Grounding Strap, 8AWG, 5/8" Stud	8-16	101.6 ± 5.0	(31.6)	(17)	(170)
A816X28TFB203	8" Double-Ended Grounding Strap, 8AWG, 5/8" Stud	8-16	203.2 ± 5.0	(31.6)	(17)	(271.6)
A816X28TFB305	12" Double-Ended Grounding Strap, 8AWG, 5/8" Stud	8-16	304.8 ± 5.0	(31.6)	(17)	(373.2)
A816X28TFB406	16" Double-Ended Grounding Strap, 8AWG, 5/8" Stud	8-16	406.4 ± 5.0	(31.6)	(17)	(474.8)
A816X28TFB508	20" Double-Ended Grounding Strap, 8AWG, 5/8" Stud	8-16	508 ± 12.7	(31.6)	(17)	(576.4)
A816X28TFB610	24" Double-Ended Grounding Strap, 8AWG, 5/8" Stud	8-16	609.6 ± 12.7	(31.6)	(17)	(678)



PAGE	2 OF 2	
SCALE	1: 1	
DRAWN BY	STEVEN PILKINGTON	
CHECKED BY	BENNY JUDKINS	

DIMENSION (MM) LENGTH TOLERANCE
 Unless otherwise specified:
 ≤ 457.2: ± 5.0 (default)
 > 457.2 to 914.4: ± 12.0
 > 914.4: ± 25.4
 () = Reference

DESCRIPTION	See Tables on Page 2	
PART NO.	See Tables on Page 2	
DRAWING NO.	GAM-1228	DATE
		4/7/2025

REV.	DESCRIPTION	DATE	BY

4

3

2

1