


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SPND-001T-C0.5	PNI Connector Female Contact
2	SPNI-001T-P0.5	PNI Connector Male Contact
3	UL1061, 22 AWG	Black

Electrical Specifications
Current: 3.0A AC/DC
Voltage: 100V AC/DC

APPLICABLE HOUSINGS				
NO. OF CIRCUITS	PLUG HOUSING (FOR FEMALE CONTACT) PART NO.	SOCKET HOUSINGS (FOR MALE CONTACT)		OPTIONAL RETAINER
		WITHOUT PANEL LOCKS	WITH PANEL LOCKS	
2	PNIRP-02V-S	PNIRR-02VF	PNIRR-02V	PNIS-02V
3	PNIRP-03V-S	PNIRR-03VF	PNIRR-03V	PNIS-03V
4	PNIRP-04V-S	PNIRR-04VF	PNIRR-04V	PNIS-04V
5	PNIRP-05V-S	PNIRR-05VF	PNIRR-05V	PNIS-05V
6	PNIRP-06V-S	PNIRR-06VF	PNIRR-06V	PNIS-06V
8	PNIRP-08V-S	PNIRR-08VF	PNIRR-08V	PNIS-08V
10	PNIRP-010V-S	PNIRR-10VF	PNIRR-10V	PNIS-10V

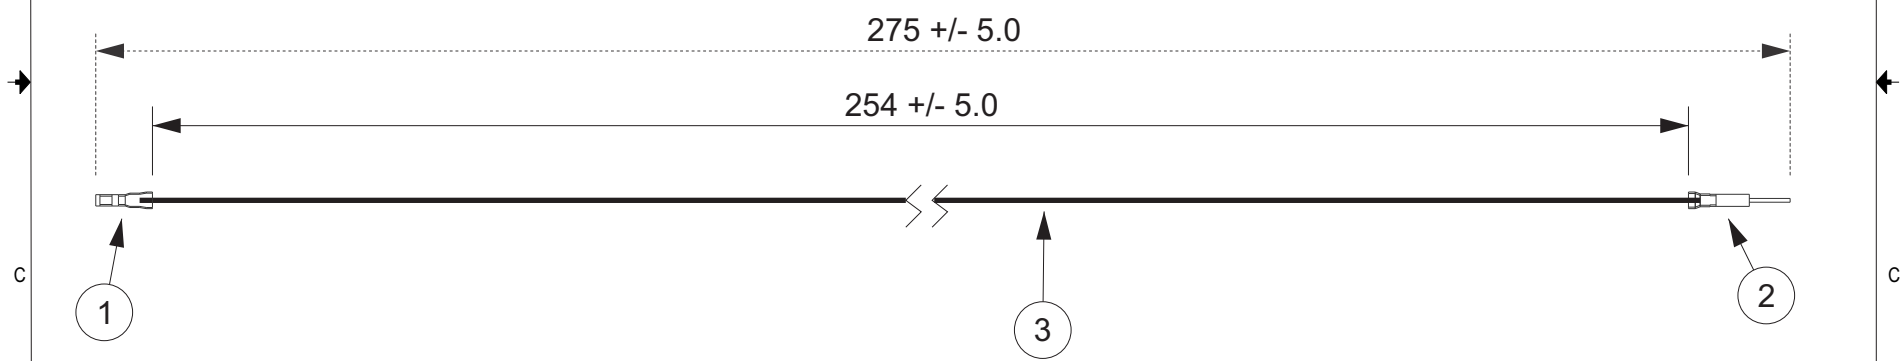

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME			
	DESCRIPTION 2.0mm Pitch PNI Series Standard Leads - 10" Inside Length DOUBLE END LEADS, F-M			
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV
Checked By: Steven Pilkington	SCALE 1:1	DRAWING NO. GAM-354	ASPNDSPNI22K254	DATE 5/7/2018

ZONE	REV	DESCRIPTION	DATE	APPROVED
1	1	Add Electrical Specifications	7/02/2018	LM

1 2 3 4 5 6 7 8