


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description	APPLICABLE HOUSINGS				
			NO. OF CIRCUITS	HOUSING PART NO.			
1	SXNI-001T-P0.6	XNI Connector Female Contact	2	XNIRP-02V-A-S			
2	UL1007, 22 AWG	Black	3	XNIRP-03V-A-S			
			4	XNIRP-04V-A-S			
			5	XNIRP-05V-A-S			
			6	XNIRP-06V-A-S			
			7	XNIRP-07V-A-S			
			8	XNIRP-08V-A-S			
			9	XNIRP-09V-A-S			
			10	XNIRP-10V-A-S			
			11	XNIRP-11V-A-S			
			15	XNIRP-15V-A-S			

<u>Electrical Specifications</u>
Current: 3.0AAC/DC
Voltage: 250V AC/DC

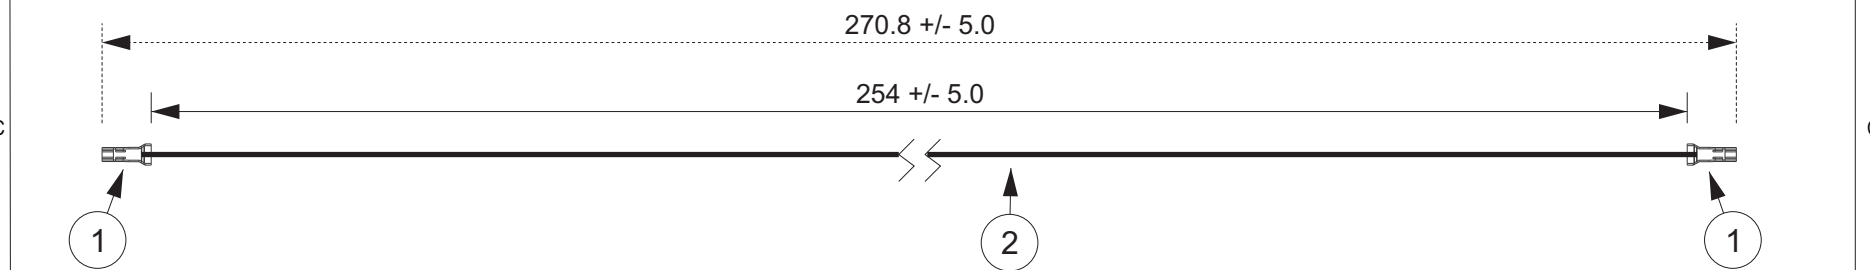

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.					CUSTOMER NAME			
					DESCRIPTION			
					2.5mm Pitch XNI Series Standard Leads - 10" Inside Length DOUBLE END LEADS			
Drawn By:	Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV			
Checked By:	Steven Pilkington	SCALE	1:1	DRAWING NO.	GAM-375	ASXNISXNI22K254	DATE	5/14/2018
ZONE	REV	DESCRIPTION	DATE	APPROVED				
	1	Add Electrical Specifications	7/02/2018	LM				