


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SPSM-41T-M1.1	PSI Connector - Male Contact
2	SPSI-41T-M1.1	PSI Connector - Female Contact
3	UL1007, 16 AWG	Black

Electrical Specifications
Current: 12.0AAC/DC
Voltage: 300V AC/DC

APPLICABLE HOUSINGS				
NO. OF CIRCUITS	KEYING	FEMALE CONTACT HOUSING PART NO.	MALE CONTACT HOUSING PART NO.	HOUSING COLOR
2	A	PSIP-02V-LE-A	PSIR-02V-LE-A	LIGHT BLUE
	B	PSIP-02V-Y-B	PSIR-02V-Y-B	YELLOW
3	A	PSIP-03V-LE-A	PSIR-03V-LE-A	LIGHT BLUE
	B	PSIP-03V-Y-B	PSIR-03V-Y-B	YELLOW

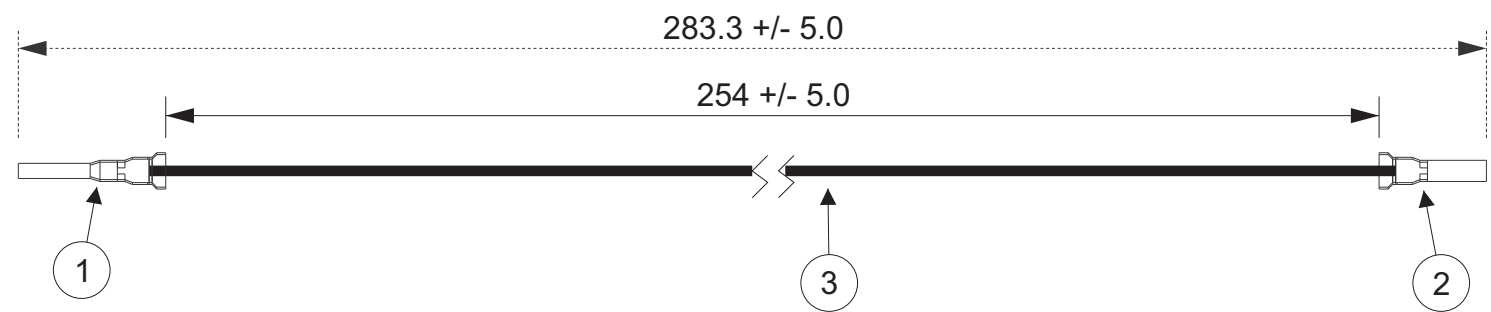

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME	
Drawn By: Larissa Mosley		DESCRIPTION	
Checked By: Steven Pilkington		4.0mm Pitch PSI Series Standard Leads - 10" Inside Length DOUBLE END LEADS, F-M	
SIZE	CUSTOMER PART NO.	PART NO.	REV
SCALE	1:1	ASPSISPSM16K254	
DRAWING NO. GAM-417		DATE 5/23/2018	

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	7/02/2018	LM