


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SRSF-21T-250A	RSF Contact, Brass Tin-Plated
2	UL1015, 20 AWG	Black

Electrical Specifications
Current: 20A AC/DC
Voltage: 250V AC/DC

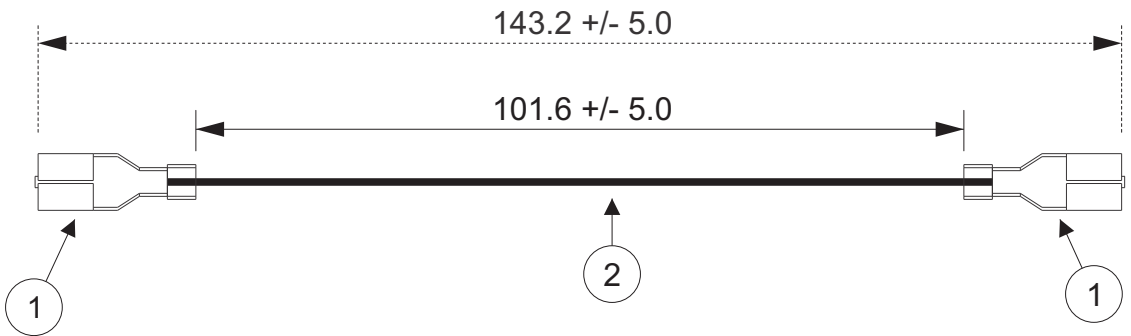

Applicable Housings	
NO. OF CIRCUITS	KEYLESS HOUSING PART NO.
2	RSFP-2V-00
3	RSFP-3V-00
4	RSFP-4V-00
5	RSFP-5V-00
6	RSFP-6V-00
7	RSFP-7V-00
8	RSFP-8V-00
9	RSFP-9V-00
10	RSFP-10V-00
11	RSFP-11V-00
12	RSFP-12V-00

*Other housings and configurations are available. Please contact JST details.



All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME	
Drawn By: Larissa Mosley		DESCRIPTION	
Checked By: Steven Pilkington		4" LIF, POS LOCK, .250, DOUBLE-END LEADS, BRASS TIN PLATED, F-F	
SIZE	CUSTOMER PART NO.	PART NO.	REV
SCALE 1:1	DRAWING NO. GAM-486	ASRSFSRSF20K102B	DATE 6/13/2018

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	7/03/2018	LM