


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	See Table 1	DS Connector
2	See Table 1	KR Connector
3	UL1061, 28 AWG	White
<b>DS Electrical Specifications</b>		<b>KR Electrical Specifications</b>
Current: 0.7A AC/DC		Current: 1.0A AC/DC
Voltage: 100V AC/DC		Voltage: 100V AC/DC

TABLE 1				
ITEM	NO. OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NO.	TOTAL WIRE REQUIRED
1	2	02DS-8E	A02KR02DS28W254B	526.8 mm
2		02KR-8M-P		
1	3	03DS-8E	A03KR03DS28W254B	790.2 mm
2		03KR-8M-P		
1	4	04DS-8E	A04KR04DS28W254B	1,053.6 mm
2		04KR-8M-P		
1	5	05DS-8E	A05KR05DS28W254B	1,317 mm
2		05KR-8M-P		
1	6	06DS-8E	A06KR06DS28W254B	1,580.4 mm
2		06KR-8M-P		
1	7	07DS-8E	A07KR07DS28W254B	1,843.8 mm
2		07KR-8M-P		
1	8	08DS-8E	A08KR08DS28W254B	2,107.2 mm
2		08KR-8M-P		
1	9	09DS-8E	A09KR09DS28W254B	2,370.6 mm
2		09KR-8M-P		
1	10	10DS-8E	A10KR10DS28W254B	2,634 mm
2		10KR-8M-P		
1	11	11DS-8E	A11KR11DS28W254B	2,897.4 mm
2		11KR-8M-P		
1	12	12DS-8E	A12KR12DS28W254B	3,160.8 mm
2		12KR-8M-P		
1	13	13DS-8E	A13KR13DS28W254B	3,424.2 mm
2		13KR-8M-P		
1	14	14DS-8E	A14KR14DS28W254B	3,687.6 mm
2		14KR-8M-P		
1	15	15DS-8E	A15KR15DS28W254B	3,951 mm
2		15KR-8M-P		

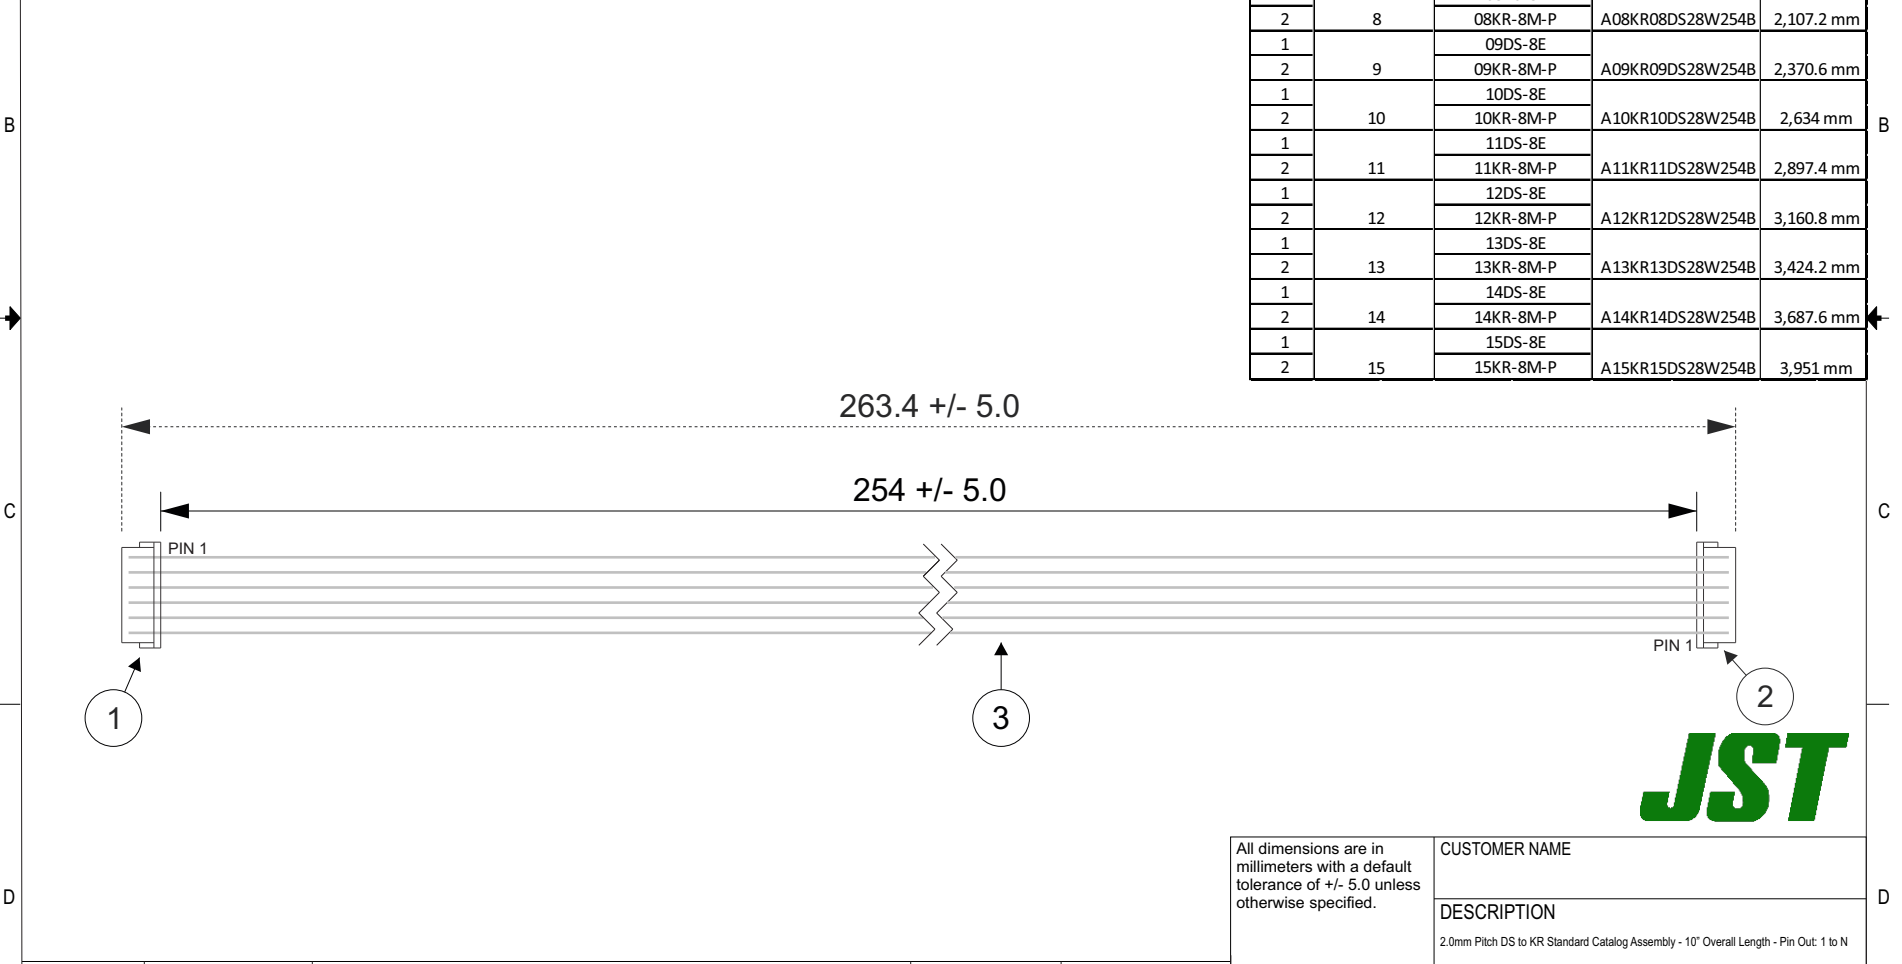

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME		
		DESCRIPTION		
		2.0mm Pitch DS to KR Standard Catalog Assembly - 10' Overall Length - Pin Out: 1 to N		
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV
Checked By: Steven Pilkington	SCALE	SEE TABLE 1		
	1:1	DRAWING NO. GAM-536	DATE 6/20/2018	

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	6/29/2018	LM