


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

ITEM	QTY.	PART NO.	DESCRIPTION
1	2	SPH-001T-P0.5L	PAD HOUSING CONTACT
2	311.7mm	22AWG, UL1061	BLACK

APPLICABLE HOUSINGS	
NO. OF CIRCUITS	HOUSING PART NO.
10	PADP-10V-1-S
12	PADP-12V-1-S
14	PADP-14V-1-S
16	PADP-16V-1-S
20	PADP-20V-1-S
22	PADP-22V-1-S
24	PADP-24V-1-S
40	PADP-40V-1-S

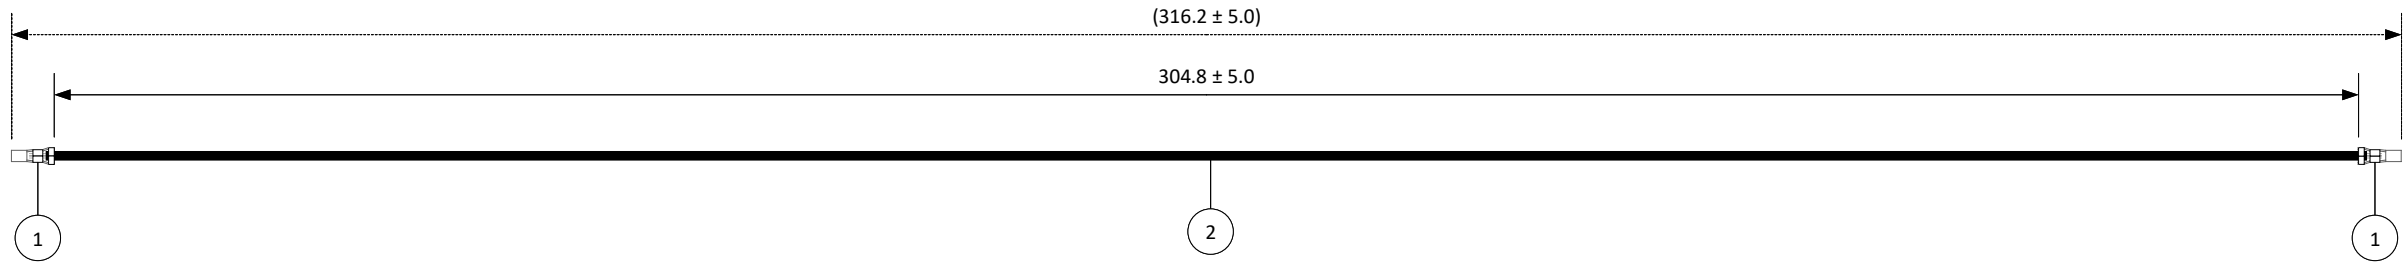

SCALE	1: 1	Electrical Specifications
DIMENSIONS	All dimensions are in MM with a tolerance of ± 5.0 unless otherwise specified.	Current: 3.0A AC/DC
		Voltage: 250V AC/DC
DRAWN BY	STEVEN PILKINGTON	DESCRIPTION
CHECKED BY	JUSTIN BAKER	2.0mm Pitch PAD Series Standard Lead - 12" Inside Length – Double End
		PART NO.
		APADPAD22K305
		DRAWING NO.
		GAM-572
		DATE
		3/8/2023



REV.	DESCRIPTION	DATE	BY
1	Revised wire style from UL1007 to UL1061	3/7/2023	SP

4

3

2

1

4

3

2

1

D

C

B

A

D

C

B

A