


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SXM-001T-P0.6	XMA Connector Contact
2	UL1007, 22 AWG	Black

Electrical Specifications
Current: 3AAC/DC
Voltage: 250V AC/DC

APPLICABLE HOUSINGS	
NO. OF CIRCUITS	HOUSING PART NO.
2	XMAR-02VF-1-S
	XMAR-02VF-2-R
	XMAR-02VF-3-E
3	XMAR-03VF-1-S
	XMAR-03VF-2-R
	XMAR-03VF-3-E
4	XMAR-04VF-S
5	XMAR-05VF-S
6	XMAR-06VF-S

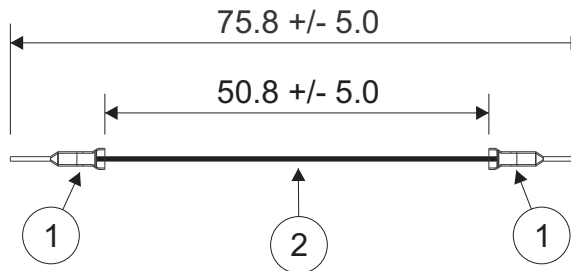

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME			
		DESCRIPTION 2.5mm Pitch XMA Series Standard Leads - 2" Inside Length DOUBLE END LEADS, M-M			
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV	
Checked By: Steven Pilkington	SCALE 1:1	DRAWING NO. GAM-605	ASXMSXM22K51	DATE 12/28/2018	

ZONE	REV	DESCRIPTION	DATE	APPROVED