


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description	APPLICABLE HOUSINGS				
1	SXA-001T-P0.6L	XMA Connector Contact	NO. OF CIRCUITS	HOUSING PART NO.			
2	UL1007, 22 AWG	Black	2	XMAP-02V-1-S			
<table border="1"> <tr> <th>Electrical Specifications</th> </tr> <tr> <td>Current: 3AAC/DC</td> </tr> <tr> <td>Voltage: 250V AC/DC</td> </tr> </table>			Electrical Specifications	Current: 3AAC/DC	Voltage: 250V AC/DC		XMAP-02V-2-R
			Electrical Specifications				
			Current: 3AAC/DC				
Voltage: 250V AC/DC							
	XMAP-02V-3-E						
			3	XMAP-03V-1-S			
				XMAP-03V-2-R			
				XMAP-03V-3-E			
			4	XMAP-04V-S			
			5	XMAP-05V-S			
			6	XMAP-06V-S			

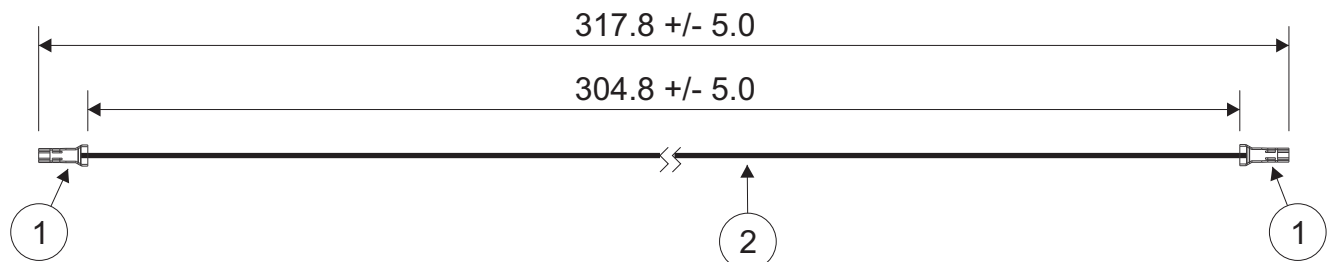

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME	
		DESCRIPTION	
		2.5mm Pitch XMA Series Standard Leads - 12" Inside Length DOUBLE END LEADS, F-F	
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.
Checked By: Steven Pilkington	SCALE	ASXALSXAL22K305	REV
	1:1	DRAWING NO. GAM-618	DATE 12/28/2018

ZONE	REV	DESCRIPTION	DATE	APPROVED