


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SZM-41T-P0.7	ZL Male Connector Contact
2	SZF-41T-P0.7	ZL Female Connector Contact
3	UL1015, 16 AWG	Black

Electrical Specifications
Current: 10AAC/DC
Voltage: 300V AC/DC

APPLICABLE HOUSINGS			
FOR PIN CONTACT		FOR SOCKET CONTACT	
NO. OF CIRCUITS	HOUSING PART NO.	NO. OF CIRCUITS	HOUSING PART NO.
2	ZLR-02V	2	ZLP-02V
4	ZLR-04V	4	ZLP-04V
6	ZLR-06V	6	ZLP-06V
8	ZLR-08V	8	ZLP-08V
12	ZLR-12V	12	ZLP-12V
16	ZLR-16V	16	ZLP-16V

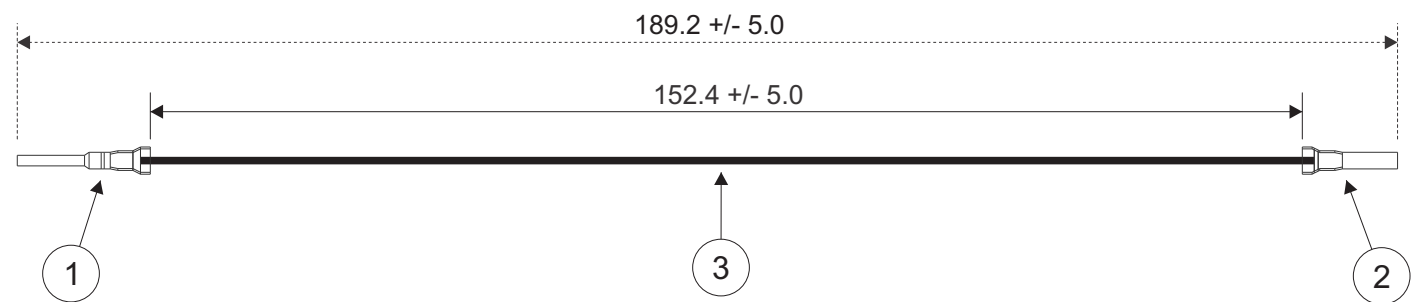

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME		
	DESCRIPTION 5.0mm Pitch ZL Series Standard Leads - 6" Inside Length DOUBLE END LEADS, M-F		
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.
Checked By: Steven Pilkington	SCALE 1:1	DRAWING NO. GAM-676	REV ASZMSZF16K152
		DATE 1/18/2019	

ZONE	REV	DESCRIPTION	DATE	APPROVED
1				
2				
3				
4				
5				