


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

1	2	3	4
Item No.	Part No.	Description	
1	SF1F-21GC-P0.6	JFA Female Connector Contact	
2	UL1007, 18 AWG	Black	

Electrical Specifications
Current: 6.4AAC/DC
Voltage: 125V AC/DC

APPLICABLE HOUSINGS		
NO. OF CIRCUITS	HOUSING PART NO.	KEYING
3	J11SF-03V-KX	X
	J11SF-03V-KY	Y
6	J11DF-06V-KX	X
	J11DF-06V-KY	Y
8	J11DF-08V-KX	X
	J11DF-08V-KY	Y
12	J11DF-12V-KX	X
	J11DF-12V-KY	Y
20	J11DF-20V-KX	X
	J11DF-20V-KY	Y
22	J11DF-22V-KX	X
	J11DF-22V-KY	Y
26	J11DF-26V-KX	X
	J11DF-26V-KY	Y
30	J11DF-30V-KX	X
	J11DF-30V-KY	Y

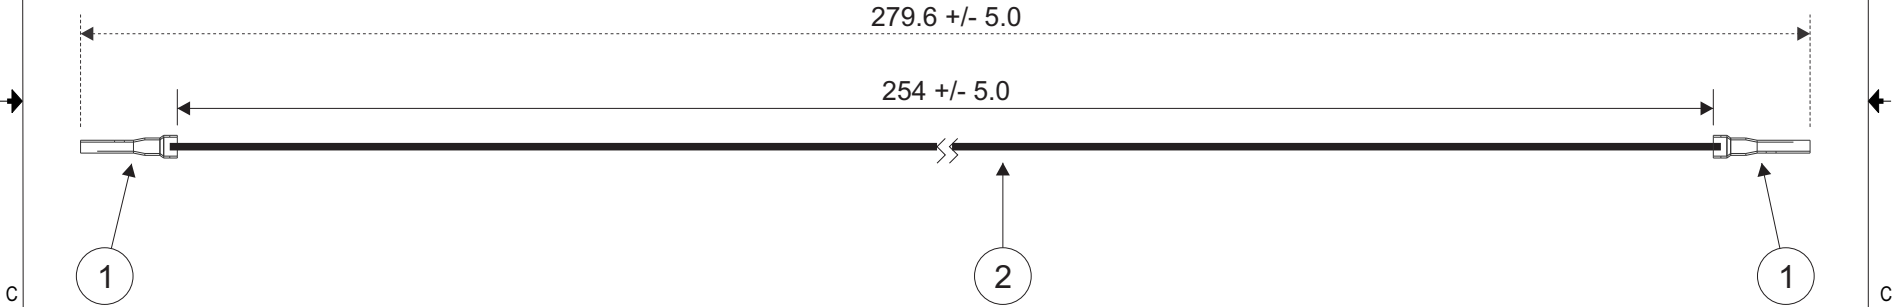

ZONE	REV	DESCRIPTION	DATE	APPROVED
1				
2				
3				
4				

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME		
	DESCRIPTION		
2.2mm Pitch JFA (J1000) Series Standard Leads - 10" Inside Length DOUBLE END LEADS, F-F			
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.
Checked By: Steven Pilkington	SCALE	DRAWING NO.	DATE
	1:1	ASF1FSF1F18K254	2/6/2019