


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SF1M-21GC-M0.6A	JFA Male Connector Contact
2	SF1F-21GC-P0.6	JFA Female Connector Contact
3	UL1007, 18 AWG	Black

Electrical Specifications
Current: 6.4AAC/DC
Voltage: 125V AC/DC

APPLICABLE HOUSINGS					
FOR FEMALE CONTACT			FOR MALE CONTACT		
NO. OF CIRCUITS	HOUSING PART NO.	KEYING	NO. OF CIRCUITS	HOUSING PART NO.	KEYING
3	J11SF-03V-KX	X	3	J11SFM-03V-KX	X
	J11SF-03V-KY	Y		-	-
6	J11DF-06V-KX	X	6	J11DFM-06V-KX	X
	J11DF-06V-KY	Y		J11DFM-06V-KY	Y
8	J11DF-08V-KX	X	8	J11DFM-08V-KX	X
	J11DF-08V-KY	Y		-	-
12	J11DF-12V-KX	X	12	J11DFM-12V-KX	X
	J11DF-12V-KY	Y		-	-
20	J11DF-20V-KX	X	20	J11DFM-20V-KX	X
	J11DF-20V-KY	Y		-	-
22	J11DF-22V-KX	X	26	J11DFM-26V-KX	X
	J11DF-22V-KY	Y		J11DFM-26V-KY	Y
26	J11DF-26V-KX	X	-	-	-
	J11DF-26V-KY	Y	-	-	-
30	J11DF-30V-KX	X	-	-	-
	J11DF-30V-KY	Y	-	-	-

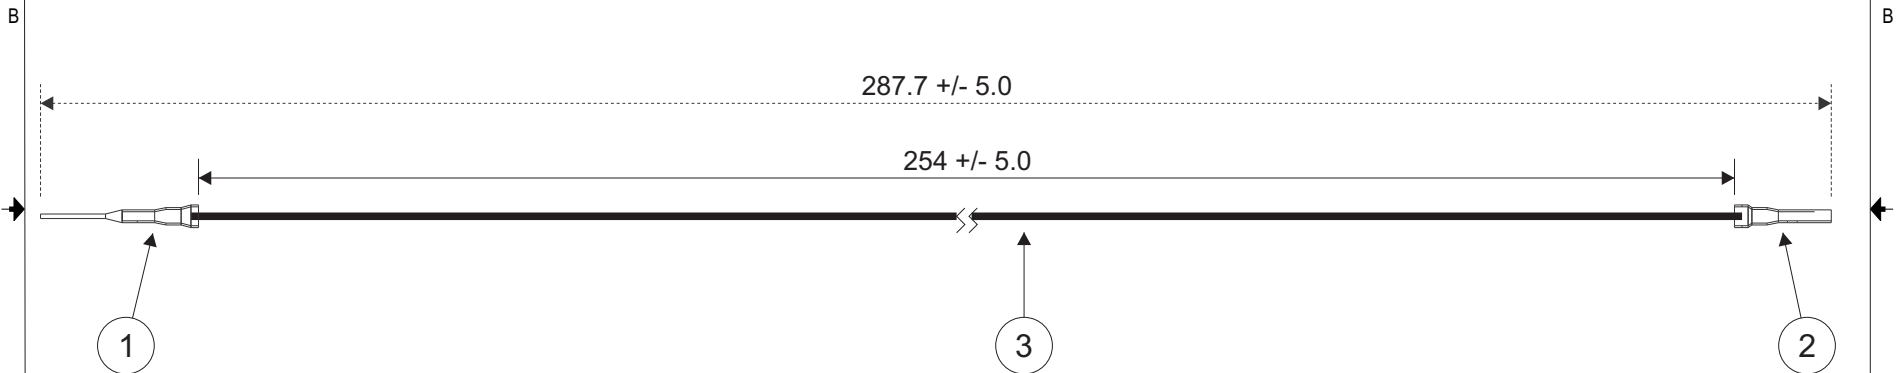

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME	
		DESCRIPTION	
		2.2mm Pitch JFA (J1000) Series Standard Leads - 10" Inside Length DOUBLE END LEADS, M-F	
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.
Checked By: Steven Pilkington	SCALE	ASF1MSF1F18K254	REV
	1:1	DRAWING NO. GAM-736	DATE 2/6/2019

ZONE	REV	DESCRIPTION	DATE	APPROVED
1				
2				
3				
4				
5				