


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SJ2M-21GF-M1.0N	JFA Male Connector Contact
2	UL1007, 20 AWG	Black

Electrical Specifications
Current: 4.6AAC/DC
Voltage: 250V AC/DC

APPLICABLE HOUSINGS			
TYPE	NO. OF CIRCUITS	HOUSING PART NO.	KEYING
PANEL MOUNTING (SINGLE ROW)	3	J21SPM-03V-KX	X
		J21SPM-03V-KY	Y
	4	J21SPM-04V-KX	X
		J21SPM-04V-KY	Y
PANEL MOUNTING (DOUBLE ROW)	6	J21DPM-06V-KX	X
		J21DPM-06V-KY	Y
	8	J21DPM-08V-KX	X
		J21DPM-08V-KY	Y
	10	J21DPM-10V-KX	X
		J21DPM-10V-KY	Y
	12	J21DPM-12V-KX	X
		J21DPM-12V-KY	Y
	16	J21DPM-16V-KX	X
		J21DPM-16V-KY	Y
	20	J21DPM-20V-KX	X
		J21DPM-20V-KY	Y

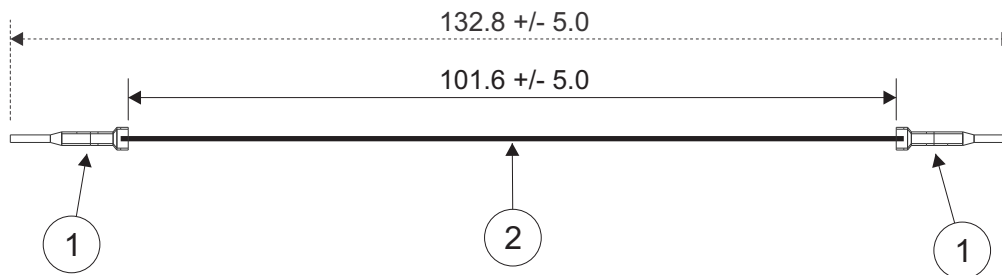

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME			
		DESCRIPTION 2.5mm Pitch JFA (J2000) Series Standard Leads - 4" Inside Length DOUBLE END LEADS, M-M			
Drawn By: Larissa Mosley	Checked By: Steven Pilkington	SIZE	CUSTOMER PART NO.	PART NO.	REV
SCALE 1:1		DRAWING NO. GAM-752	ASJ2MSJ2M20K102		DATE 2/13/2019

ZONE	REV	DESCRIPTION	DATE	APPROVED
1				
2				
3				
4				
5				