


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SJ2F-21GF-P1.0	JFA Female Connector Contact
2	UL1007, 20 AWG	Black

Electrical Specifications
Current: 4.6AAC/DC
Voltage: 250V AC/DC

APPLICABLE HOUSINGS			
TYPE	NO. OF CIRCUITS	HOUSING PART NO.	KEYING
CENTER LOCKING (SINGLE ROW)	3	J21SF-03V-KX-L	X
		J21SF-03V-KY-L	Y
		J21SF-04V-KX-L	X
CENTER LOCKING (DOUBLE ROW)	4	J21SF-04V-KY-L	Y
		J21DF-06V-KX-L	X
	6	J21DF-06V-KY-L	Y
		J21DF-08V-KX-L	X
	8	J21DF-08V-KY-L	Y
		J21DF-10V-KX-L	X
	10	J21DF-10V-KY-L	Y
		J21DF-12V-KX-L	X
	12	J21DF-12V-KY-L	Y
		J21DF-16V-KX-L	X
16	J21DF-16V-KY-L	Y	
	J21DF-20V-KX-L	X	
20	J21DF-20V-KY-L	Y	
	SIDE LOCKING	J22DF-10V-KX	X
J22DF-10V-KY		Y	
MODULE TYPE	2	J25MF-02V-K	-
	4	J25MF-04V-K	-
COMMON TYPE	3	J23CF-03V-KS1	S1
		J23CF-03V-KS2	S2
		J23CF-03V-KS3	S3
		J23CF-03V-KS4	S4
		J23CF-03V-KS5	S5
		J23CF-03V-KS6	S6
		J23CF-03V-KS7	S7
		J23CF-03V-KS8	S8

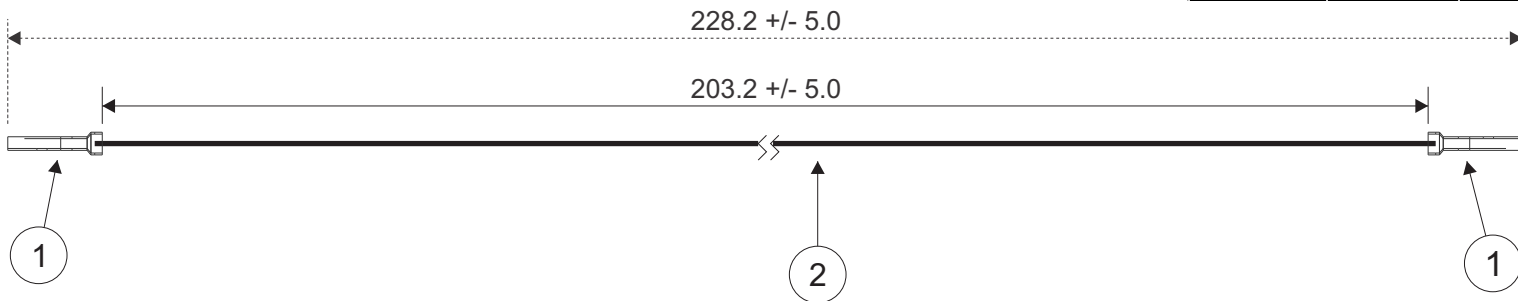

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME			
	DESCRIPTION 2.5mm Pitch JFA (J2000) Series Standard Leads - 8" Inside Length DOUBLE END LEADS, F-F			
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV
Checked By: Steven Pilkington	SCALE 1:1	DRAWING NO. GAM-756	ASJ2FSJ2F20K203	DATE 2/13/2019

ZONE	REV	DESCRIPTION	DATE	APPROVED