


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SJ2M-21GF-M1.0N	JFA Male Connector Contact
2	SJ2F-21GF-P1.0	JFA Female Connector Contact
3	UL1007, 20 AWG	Black

Electrical Specifications	
Current:	4.6AAC/DC
Voltage:	250V AC/DC

APPLICABLE HOUSINGS							
FOR TAB CONTACT				FOR RECEPTACLE CONTACT			
TYPE	NO. OF CIRCUITS	HOUSING PART NO.	KEYING	TYPE	NO. OF CIRCUITS	HOUSING PART NO.	KEYING
PANEL MOUNTING (SINGLE ROW)	3	J21SPM-03V-KX	X	CENTER LOCKING (SINGLE ROW)	3	J21SF-03V-KX-L	X
		J21SPM-03V-KY	Y			J21SF-03V-KY-L	Y
		J21SPM-04V-KX	X			J21SF-04V-KX-L	X
PANEL MOUNTING (DOUBLE ROW)	4	J21SPM-04V-KY	Y	CENTER LOCKING (DOUBLE ROW)	4	J21SF-04V-KY-L	Y
		J21DPM-06V-KX	X			J21DF-06V-KX-L	X
	6	J21DPM-06V-KY	Y		6	J21DF-06V-KY-L	Y
		J21DPM-08V-KX	X			J21DF-08V-KX-L	X
	8	J21DPM-08V-KY	Y		8	J21DF-08V-KY-L	Y
		J21DPM-10V-KX	X			J21DF-10V-KX-L	X
	10	J21DPM-10V-KY	Y		10	J21DF-10V-KY-L	Y
		J21DPM-12V-KX	X			J21DF-12V-KX-L	X
	12	J21DPM-12V-KY	Y		12	J21DF-12V-KY-L	Y
		J21DPM-16V-KX	X			J21DF-16V-KX-L	X
16	J21DPM-16V-KY	Y	16	J21DF-16V-KY-L	Y		
	J21DPM-20V-KX	X		J21DF-20V-KX-L	X		
20	J21DPM-20V-KY	Y	20	J21DF-20V-KY-L	Y		

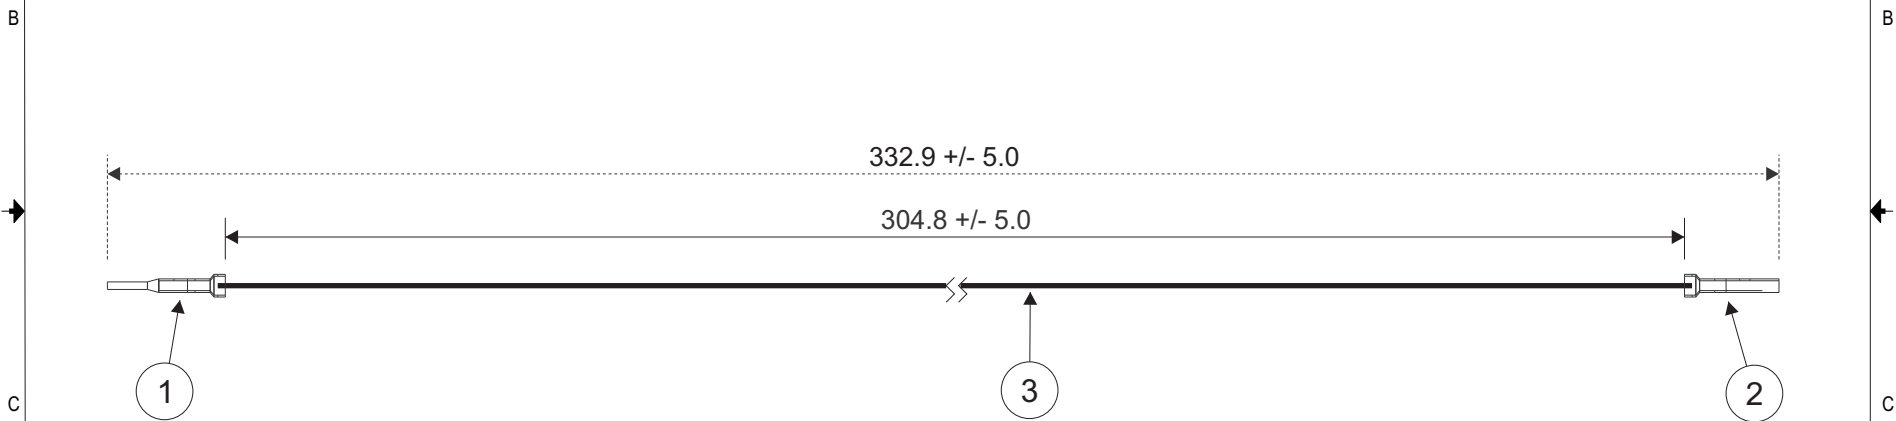

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME			
		DESCRIPTION 2.5mm Pitch JFA (J2000) Series Standard Leads - 12" Inside Length DOUBLE END LEADS, M-F			
Drawn By: Larissa Mosley	Checked By: Steven Pilkington	SIZE	CUSTOMER PART NO.	PART NO.	REV
SCALE 1:1		DRAWING NO. GAM-763	ASJ2MSJ2F20K305		DATE 2/13/2019

ZONE	REV	DESCRIPTION	DATE	APPROVED
1				
2				
3				
4				