


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

| Item No. | Part No. | Description |
|----------|----------------|------------------------------|
| 1 | SXA-01T-P0.6 | XAG Female Connector Contact |
| 2 | UL1007, 20 AWG | Black |

| Electrical Specifications |
|---------------------------|
| Current: 3.0A AC/DC |
| Voltage: 250V AC/DC |

| APPLICABLE HOUSINGS | |
|---------------------|------------------|
| NO. OF CIRCUITS | HOUSING PART NO. |
| 5 | XAGRP-051-K |

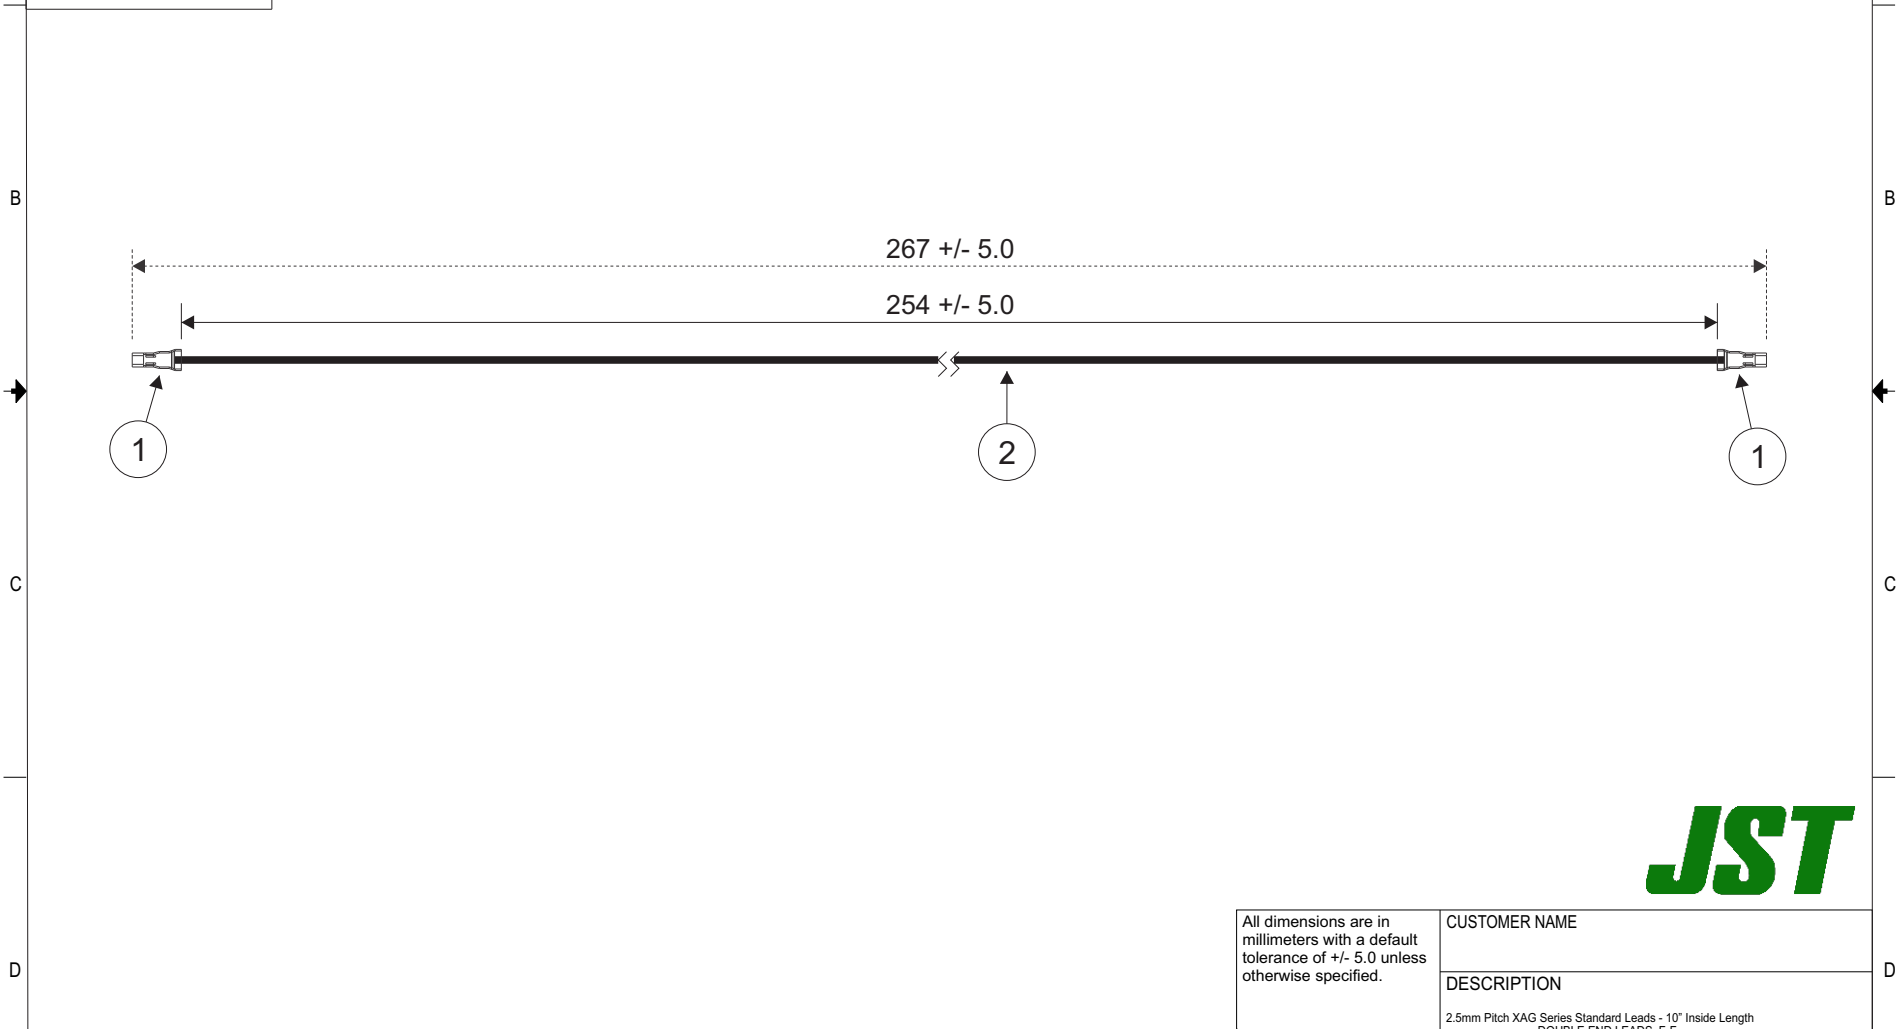

| | | | | |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------|-----------------|-------------------|
| All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified. | CUSTOMER NAME | | | |
| | DESCRIPTION 2.5mm Pitch XAG Series Standard Leads - 10" Inside Length DOUBLE END LEADS, F-F | | | |
| Drawn By: Larissa Mosley | SIZE | CUSTOMER PART NO. | PART NO. | REV |
| Checked By: Steven Pilkington | SCALE 1:1 | DRAWING NO. GAM-781 | AXAGFXAGF20K254 | DATE 2/22/2019 |

| ZONE | REV | DESCRIPTION | DATE | APPROVED |
|------|-----|-------------|------|----------|
| | | | | |