

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SXAM-01T-P0.6	XAG Male Connector Contact
2	SXA-01T-P0.6	XAG Female Connector Contact
3	UL1007, 20 AWG	Black

Electrical Specifications

Current: 3.0AAC/DC

Voltage: 250V AC/DC

APPLICABLE HOUSINGS

FOR FEMALE CONTACT		FOR MALE CONTACT	
NO. OF CIRCUITS	HOUSING PART NO.	NO. OF CIRCUITS	HOUSING PART NO.
5	XAGRP-051-K	5	XAGR-053A-K

A

A

B


B

C

C

D

D

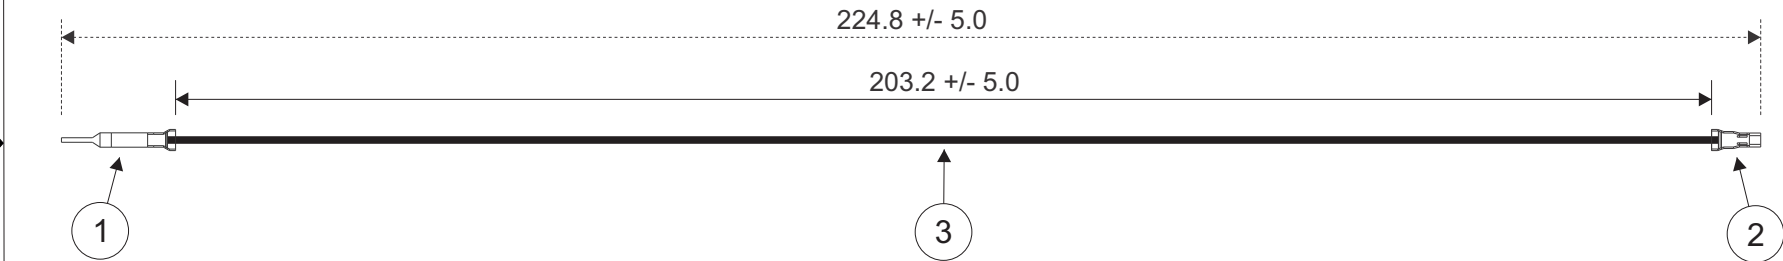

**JST**

ZONE	REV	DESCRIPTION	DATE	APPROVED
1				
2				
3				
4				
5				
6				
7				
8				

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME			
	DESCRIPTION			
Drawn By: Larissa Mosley Checked By: Steven Pilkington	2.5mm Pitch XAG Series Standard Leads - 8" Inside Length DOUBLE END LEADS, M-F			
	SIZE	CUSTOMER PART NO.	PART NO.	REV
	SCALE	1:1	DRAWING NO. GAM-786	DATE 3/6/2019
	AXAGMXAGF20K203			