


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SF3F-41GF-P2.0	JFA Connector Contact
2	UL1007, 16 AWG	Black

Electrical Specifications
Current: MAX 7.5AAC/DC
Voltage: 3.81mm pitch - 250V AC/DC 5.08mm pitch - 600V AC/DC

APPLICABLE HOUSINGS			
TYPE	NO. OF CIRCUITS	HOUSING PART NO.	KEYING
SINGLE ROW	3	F31FSS-03V-KX	X
		F31FSS-03V-KY	Y
	4	F31FSS-04V-KX	X
		F31FSS-04V-KY	Y
	5	F31FSS-05V-KX	X
		F31FSS-05V-KY	Y
	6	F31FSS-06V-KX	X
		F31FSS-06V-KY	Y
	8	F31FSS-08V-KX	X
		F31FSS-08V-KY	Y
DOUBLE ROW	6	F32FMS-06V-KXX	XX
		F32FMS-06V-KYY	YY
		F32FMS-06V-KXY	XY
	10	F32FMS-10V-KXX	XX
		F32FMS-10V-KYY	YY
		F32FMS-10V-KXY	XY
	12	F32FMS-12V-KXX	XX
		F32FMS-12V-KYY	YY
		F32FMS-12V-KXY	XY
		F32FMS-12V-KXY	XY
20	F32FMS-20V-KXX	XX	

Note: Other housings and configurations are available. Please contact JST for details.

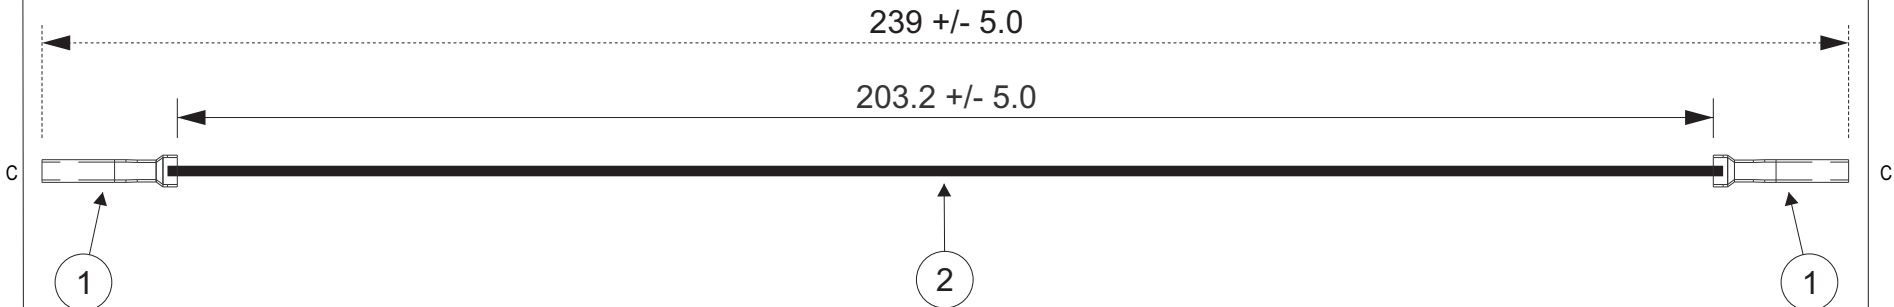

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME			
	DESCRIPTION			
Drawn By: Larissa Mosley Checked By: Steven Pilkington	SIZE	CUSTOMER PART NO.	PART NO.	REV
	SCALE	1:1	ASF3FSF3F16K203	
	DRAWING NO.	DATE		
	GAM-810	3/28/2019		

ZONE	REV	DESCRIPTION	DATE	APPROVED
1				