


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

1	2	3	4
Item No.	Part No.	Description	
1	SF3M-41GF-M2.0N	JFA Connector Contact	
2	UL1007, 16 AWG	Black	
Electrical Specifications			
Current: MAX 7.5A AC/DC			
Voltage: 3.81mm pitch - 250V AC/DC 5.08mm pitch - 600V AC/DC			

5		6		7		8		
APPLICABLE HOUSINGS								
TYPE	NO. OF CIRCUITS	HOUSING PART NO.	KEYING	TYPE	NO. OF CIRCUITS	HOUSING PART NO.	KEYING	
FREE HANGING TYPE (SINGLE ROW)	3	F31MSF-03V-KX	X	FREE HANGING TYPE (DOUBLE ROW)	6	F32MDF-06V-KXX	XX	
		F31MSF-03V-KY	Y			F32MDF-06V-KYY	YY	
	4	F31MSF-04V-KX	X		12	F32MDF-06V-KXY	XY	
		F31MSF-04V-KY	Y			F32MDF-12V-KXX	XX	
	5	F31MSF-05V-KX	X			F32MDF-12V-KYY	YY	
		F31MSF-05V-KY	Y			F32MDF-12V-KXY	XY	
	8	F31MSF-08V-KX	X	PANEL MOUNTING TYPE (DOUBLE ROW)	6	F32MDP-06V-KXX	XX	
		F31MSF-08V-KY	Y			F32MDP-06V-KYY	YY	
	10	F31MSF-10V-KX	X		12	F32MDP-06V-KXY	XY	
		F31MSF-10V-KY	Y			F32MDP-12V-KXX	XX	
PANEL MOUNTING TYPE (SINGLE ROW)	3	F31MSP-03V-KX	X			20	F32MDP-12V-KYY	YY
		F31MSP-03V-KY	Y				F32MDP-12V-KXY	XY
	4	F31MSP-04V-KX	X		-	F32MDP-20V-KXX	XX	
		F31MSP-04V-KY	Y			-	-	
	5	F31MSP-05V-KX	X			-	-	
		F31MSP-05V-KY	Y			-	-	
	8	F31MSP-08V-KX	X	-	-			
		F31MSP-08V-KY	Y	-	-			
	10	F31MSP-10V-KX	X	-	-			
		F31MSP-10V-KY	Y	-	-			
Note: Other housings and configurations are available. Please contact JST for details.								

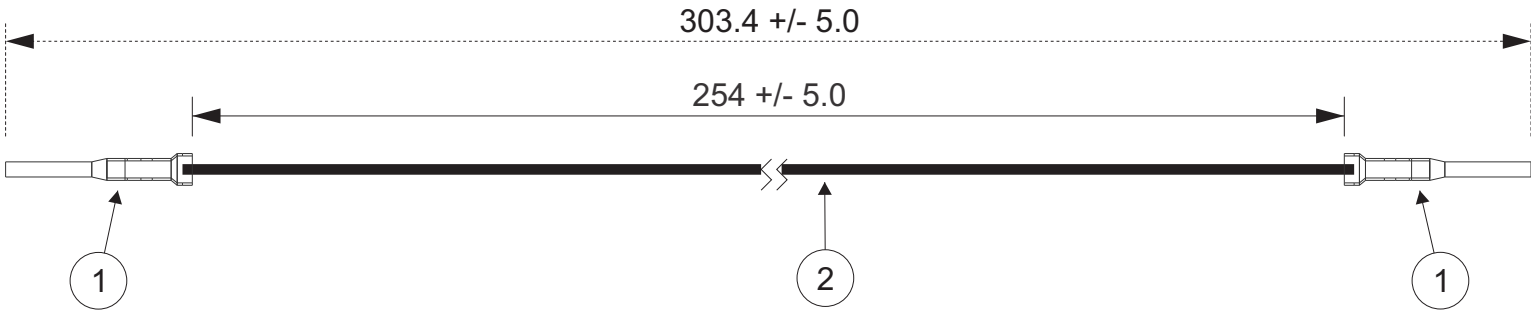

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.					CUSTOMER NAME			
					DESCRIPTION			
					3.81/5.08/5.4mm Pitch JFA (J300) Series Standard Leads - 10" Inside Length DOUBLE END LEADS, M-M			
ZONE	REV	DESCRIPTION	DATE	APPROVED	SIZE	CUSTOMER PART NO.	PART NO.	REV
							ASF3MSF3M16K254	
					SCALE	1:1	DRAWING NO. GAM-815	DATE 3/28/2019
1								
2								
3								
4								
5								
6								
7								
8								