


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SMR-001T-0.6	HM Connector Contact
2	SHR-001T-P0.6	HR Connector Contact
3	UL1007, 22 AWG	Black

<u>Electrical Specifications</u>
Current: 3A AC/DC
Voltage: 250V AC/DC

APPLICABLE HOUSINGS			
FOR MALE CONTACT		FOR FEMALE CONTACT	
NO. OF CIRCUITS	HOUSING PART NO.	NO. OF CIRCUITS	HOUSING PART NO.
2	HMR-02V	2	HRP-02-S
3	HMR-03V	3	HRP-03-S
4	HMR-04V	4	HRP-04-S
8	HMR-08V	8	HRP-08-S
12	HMR-12V	12	HRP-12-S

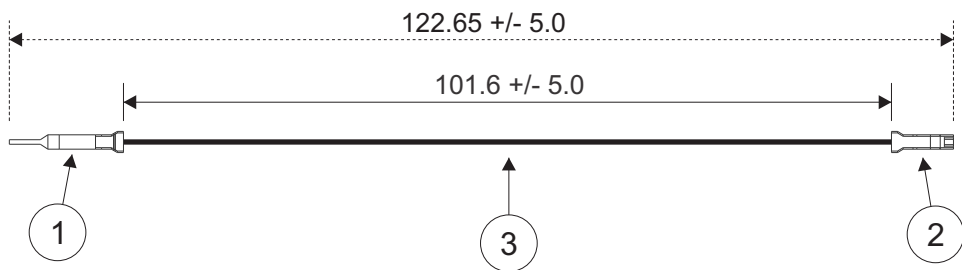

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME			
	DESCRIPTION 2.5mm Pitch HM Series Standard Leads - 4" Inside Length DOUBLE END LEADS, M-F			
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV
Checked By: Steven Pilkington	SCALE 1:1	DRAWING NO. GAM-988	DATE 5/22/2019	

ZONE	REV	DESCRIPTION	DATE	APPROVED