


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SRSF-61-250A	RSF Contact, Brass
2	UL1015, 16 AWG	Black

Electrical Specifications
Current: 20AAC/DC
Voltage: 250V AC/DC

Applicable Housings	
NO. OF CIRCUITS	KEYLESS HOUSING PART NO.
2	RSFP-2V-00
3	RSFP-3V-00
4	RSFP-4V-00
5	RSFP-5V-00
6	RSFP-6V-00
7	RSFP-7V-00
8	RSFP-8V-00
9	RSFP-9V-00
10	RSFP-10V-00
11	RSFP-11V-00
12	RSFP-12V-00

\*Other housings and configurations are available. Please contact JST details.

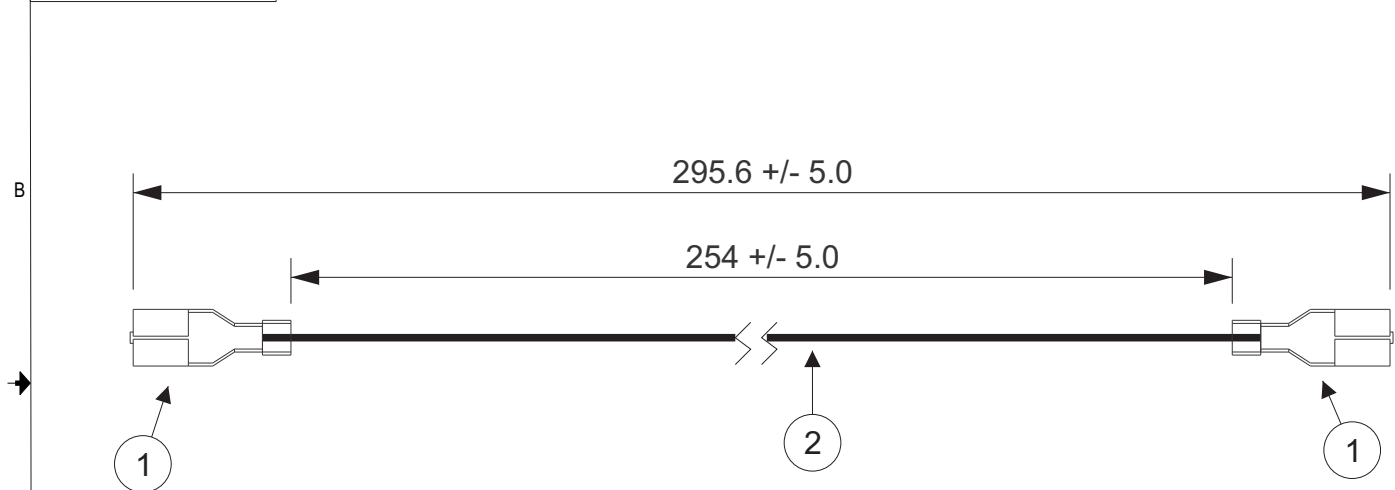

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME			
	DESCRIPTION			
	10" LIF, POS LOCK, .250, DOUBLE-END LEADS, BRASS, F-F			
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV
Checked By: Steven Pilkington	SCALE	ASRSFSRSF16K254A		
	1:1	DRAWING NO. GAM-491	DATE 6/13/2018	

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	7/03/2018	LM