


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SF3F-41GF-P2.0	JFA Connector Contact
2	UL1007, 16 AWG	Black

Electrical Specifications
Current: MAX 7.5AAC/DC
Voltage: 3.81mm pitch - 250V AC/DC 5.08mm pitch - 600V AC/DC

APPLICABLE HOUSINGS			
TYPE	NO. OF CIRCUITS	HOUSING PART NO.	KEYING
SINGLE ROW	3	F31FSS-03V-KX	X
		F31FSS-03V-KY	Y
	4	F31FSS-04V-KX	X
		F31FSS-04V-KY	Y
	5	F31FSS-05V-KX	X
		F31FSS-05V-KY	Y
	6	F31FSS-06V-KX	X
		F31FSS-06V-KY	Y
	8	F31FSS-08V-KX	X
		F31FSS-08V-KY	Y
10	F31FSS-10V-KX	X	
	F31FSS-10V-KY	Y	
DOUBLE ROW	6	F32FMS-06V-KXX	XX
		F32FMS-06V-KYY	YY
		F32FMS-06V-KXY	XY
	10	F32FMS-10V-KXX	XX
		F32FMS-10V-KYY	YY
		F32FMS-10V-KXY	XY
	12	F32FMS-12V-KXX	XX
		F32FMS-12V-KYY	YY
		F32FMS-12V-KXY	XY
	20	F32FMS-20V-KXX	XX

Note: Other housings and configurations are available. Please contact JST for details.

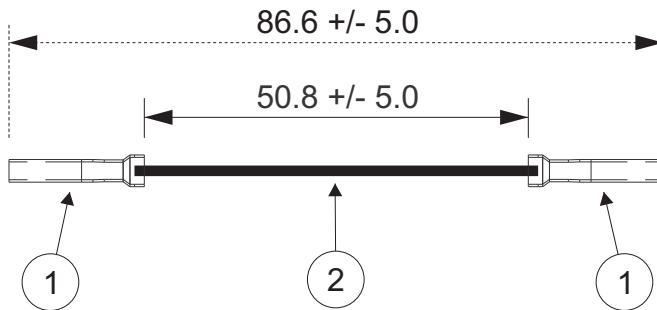

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME			
		DESCRIPTION 3.81/5.08/5.4mm Pitch JFA (J300) Series Standard Leads - 2" Inside Length DOUBLE END LEADS, F-F			
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV	
Checked By: Steven Pilkington	SCALE 1:1	DRAWING NO. GAM-801	ASF3FSF3F16K51	DATE 3/28/2019	

ZONE	REV	DESCRIPTION	DATE	APPROVED